


Connection module HD RJ45, kat.6, screened, keystone

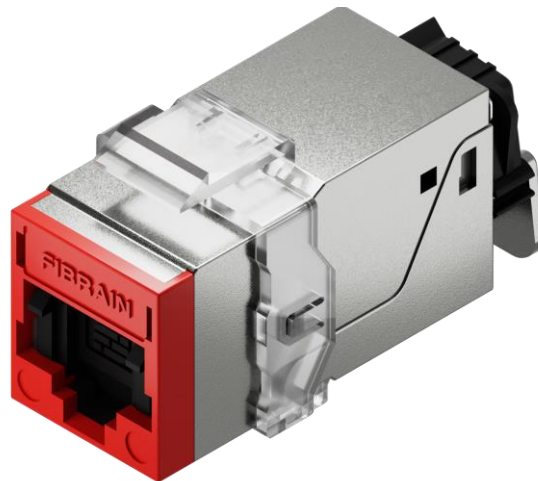

**FEATURES:**

- Cat.6 performance according to: ISO 11801, EN 50173, ANSI/TIA 568.2-D
- Screened
- Port density up to 48 ports per 1U
- The highest quality guaranteeing large margins of transmission parameters over the requirements of the standards
- The best performance in conjunction with FibrainDATA connection cables
- Component complies to IEC 60603-7-41
- Efficient signal compensation inside a module
- Toolless termination
- Module construction equipped with an element for attaching the inserted cable without the use of cable ties
- IDC termination technology
- Pins covered with layer of gold
- Module construction guaranty a minimal untwist of wire pairs
- Die cast housing guaranties 360° EMC protection
- Automatic dust cover made of different colors for color coding
- Identification according to 568A and 568B

**TECHNICAL PARAMETERS**


<b>Standardization</b>	ISO 11801-x, EN 50173-x, TIA 568.2-D, IEC 60603-7-41
<b>Operation temperature range</b>	-10 °C ÷ 60 °C
<b>Storage temperature range</b>	-40 °C ÷ 70 °C
<b>Transmission performance</b>	Cat.6
<b>Shielding</b>	Yes
<b>Housing material</b>	Zinc alloy die cast
<b>Max. Current rating [A]</b>	1,5
<b>Min. isolation resistance [MΩ]</b>	500
<b>Max DC resistance [Ω]</b>	20
<b>Material of IDC connector</b>	CuSN
<b>IDC plating</b>	Min 6 μm of gold layer, min 80 μm of nickel layer
<b>Conductor diameter range (wire)</b>	AWG 22 ÷ AWG 26
<b>Conductor diameter range ( stranded wires)</b>	AWG 22/7 ÷ AWG 26/7
<b>Cable diameter range</b>	5,0 ÷ 8,5 mm
<b>Mating cycles standard/typical</b>	750/1000
<b>Min number of re-terminations</b>	20
<b>Fixation</b>	Equipped with keystone adapter

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.

Typ:	Connection module	MSO
		REV: 0
Ref:	XQ210	F

**DIMENSIONS:**

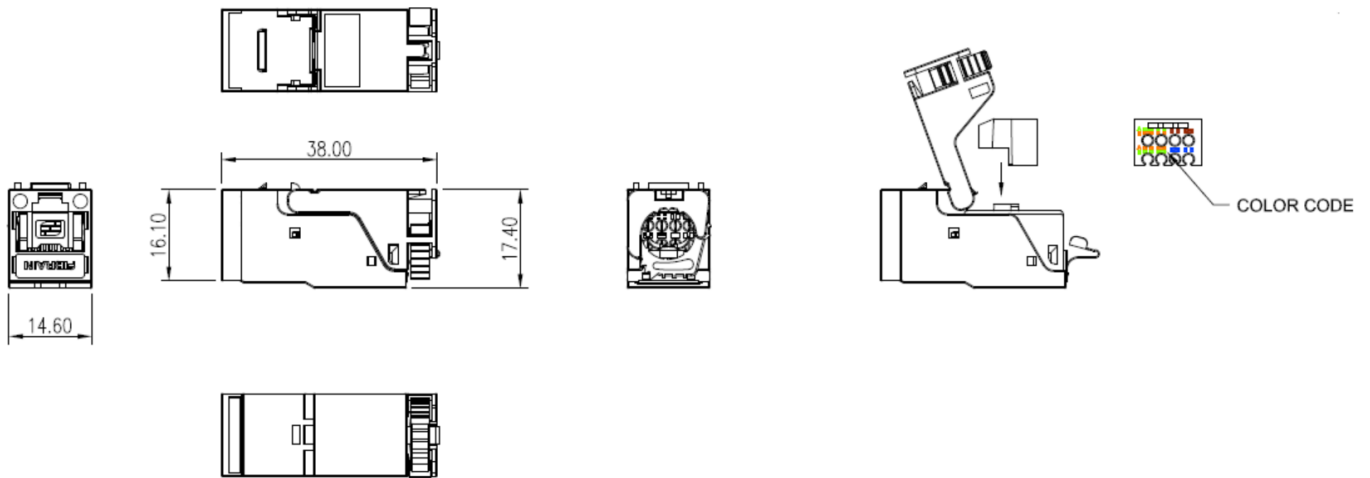

**ORDERING:**

XQ210 FibrainDATA connection module, RJ45/s, kat.6, red dust cover, keystone adapter

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.