

Patch panel FO HD 1U, without grounding, empty



DESCRIPTION:

- Fiber optic patch panel in the form of a fixed shelf with removable cover
- Capacity:
 - up to 4 splice tray SCM-A-xx
 - up to 8 adapter holder
- Max gęstość upakowania:
 - max. 96 fibers for SCsx, E2000 interface (96xSCsx/E2000)
 - max. 96 fibers for LCdx interface (48x LCdx)
 - max. 96 splices
- Range of supported connectors:
 - LCd, SC, E2000 – MM/SM

TECHNICAL SPECIFICATION

Material:

Frame – powder paint coated steel
Guidance – Plastic

Color:

Black RAL 9005

Temperature range:

-40°C do +70°C

Ingress protection:

IP 20 according to PN-EN 60529.

Weight:



1.86 kg

Scope of supply:

Frame, empty

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.

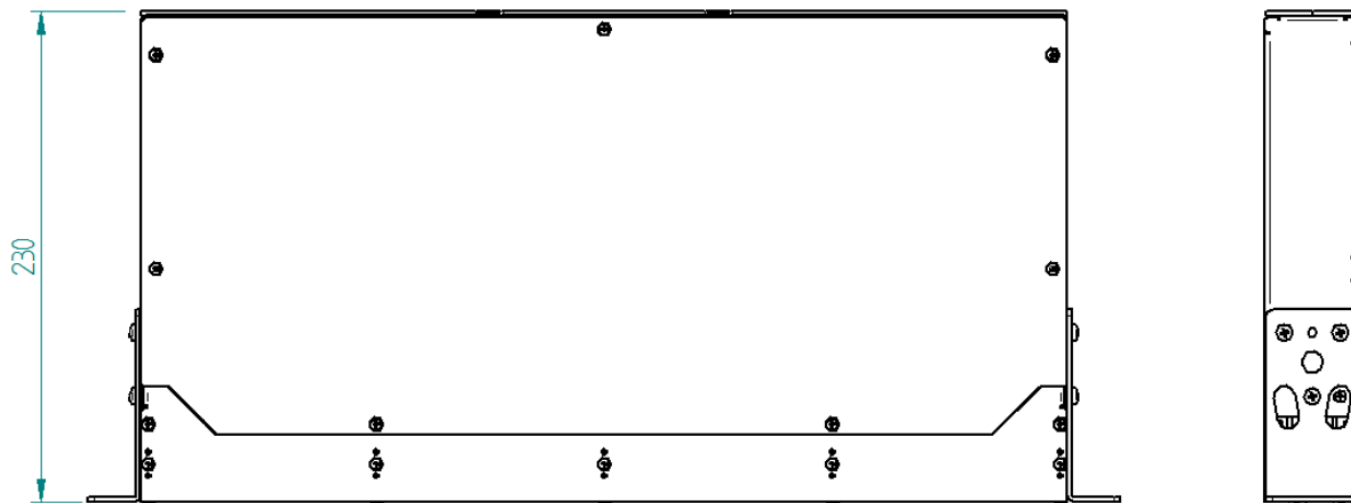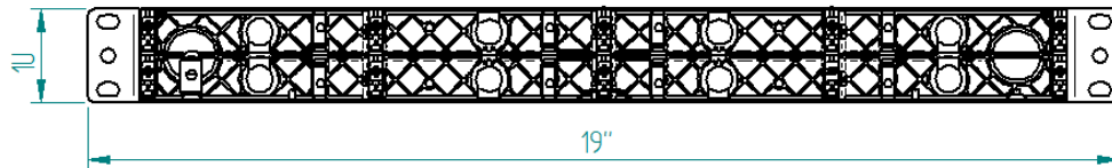

Dimensions			Reference number
Height [U = 44,45mm]	Width [inch]	Depth [mm]	
1U	19	230	XDU00

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.