


Holder for HD Patch panel for 6 x RJ45, unscreened, empty

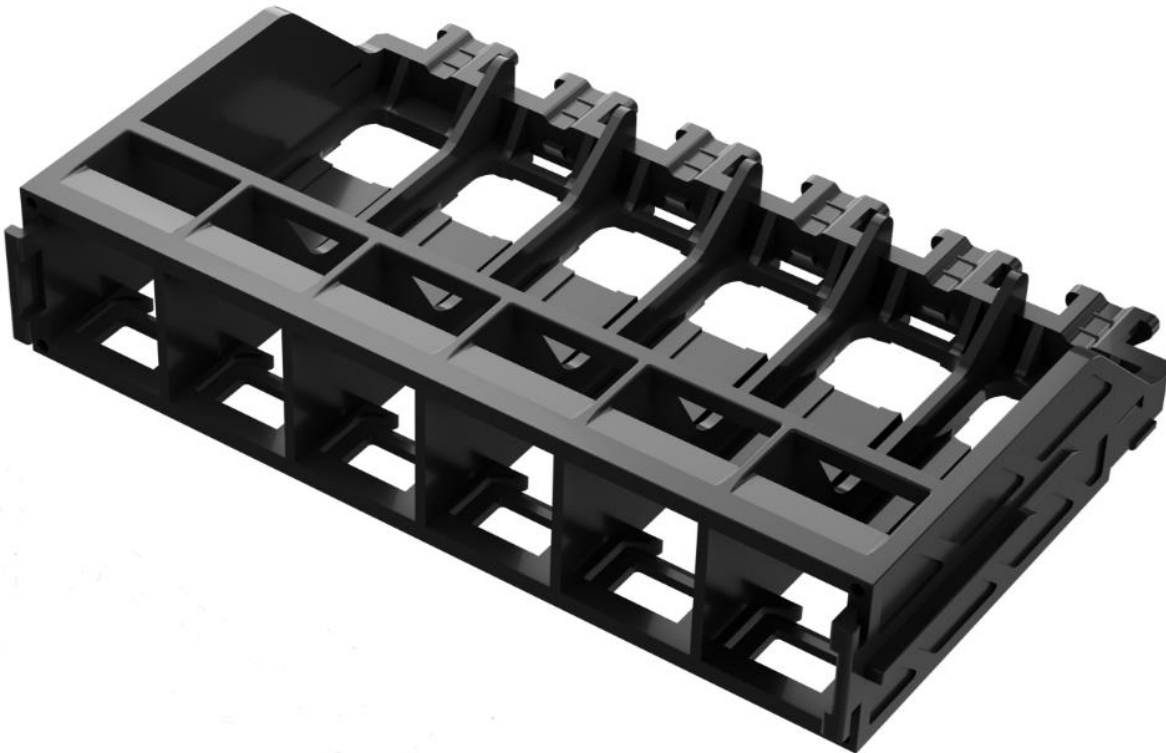

Description:

- Flexible configuration system:
 - Modularity up to 1 port,
 - Support for all categories of Fibrain HD, screened connection modules: kat.5/s, kat.6/s, kat.6A/s
 - Method of installing connection modules: without adapter
 - Optional port labeling
- Dedicated places for cable fastening
- Max density: 6xRJ45/s per holder
- Max density in HD patch panel: 8 holders per HD patch panel

Technical specification

Material:

Plastic

Color:

Black RAL 9005

Temperature range:

-40°C do +70°C

Ingress protection:

IP 20 acc. To EN 60529.

Weight:



0,23 kg

Scope of supply:

- Empty holder

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.

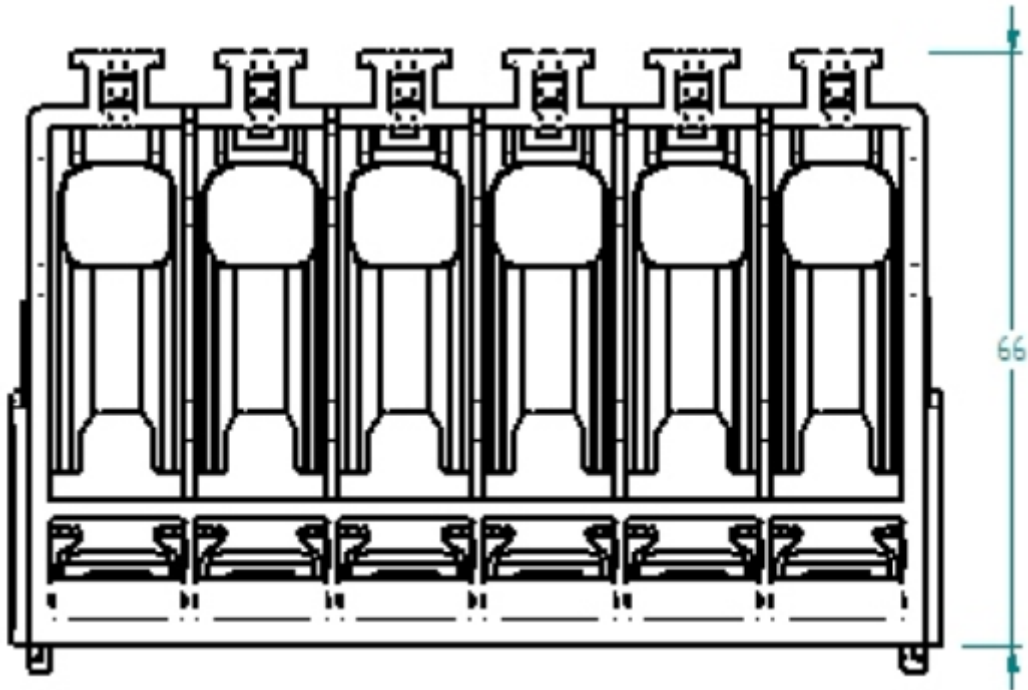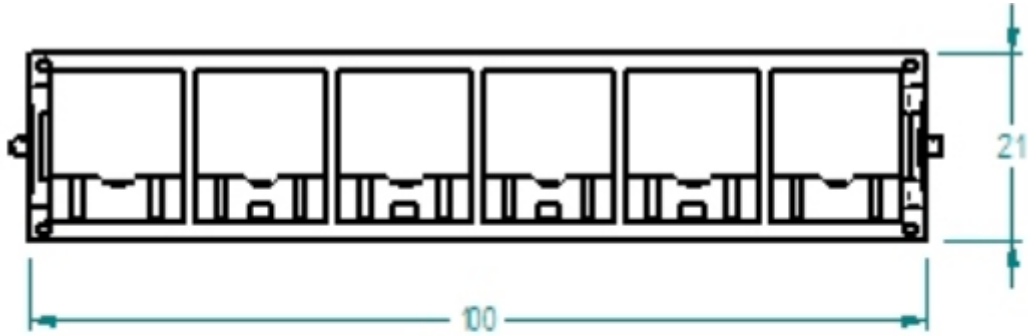

Dimensions			Reference number
Height [U = 44,45mm]	Width [mm]	Depth [mm]	
0,5	100	66	XMU00

Important notice
Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary. 2