


Patch panel HD, with grounding, empty

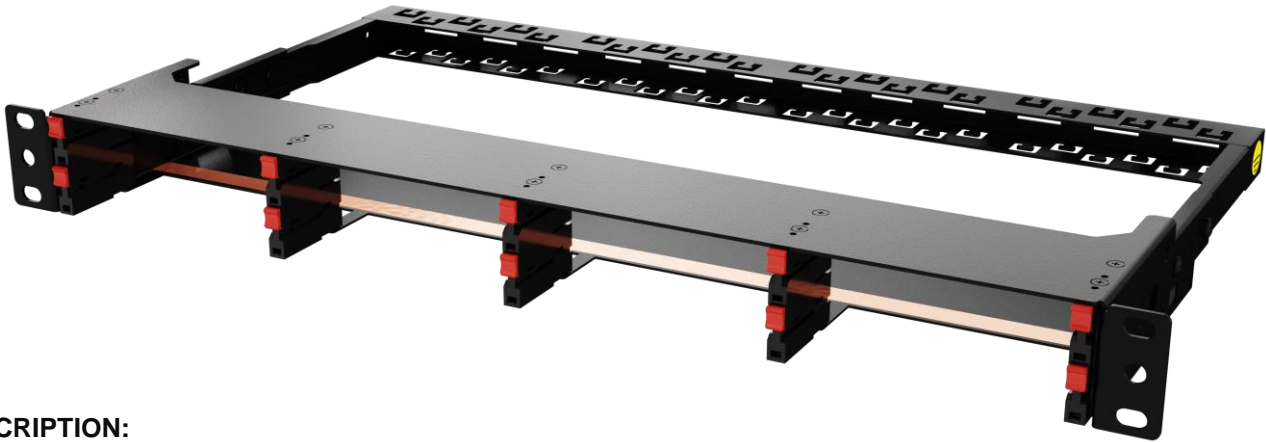

DESCRIPTION:

- Modular configuration system:
 - Possibility for FO/Cu assembling,
 - Rear bar for cable assembling
 - Optional cable manager installed at the front,
- Capacity: 8 slots for FO/Cu insertion
- Max ports density:
 - 48 ports/1U for copper
 - 192 ports for FO (for LCdx)
- Full range of connectors:
 - RJ45/s (shielded) – kat.5, kat.6. kat.6A
 - LCdx, SC – MM/SM

TECHNICAL SPECIFICATION

Material:

Frame – powder paint coated steel
Guidance – Plastic

Color:

Black RAL 9005

Temperature range

-40°C do +70°C

Ingress protection:

IP 20 Acc. to EN 60529.

Weight:

1,2 kg



Scope of supply:

Frame, empty

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.

Type:	Patch panel HD	24.05.2020
		REV: 1
Ref:	XPS00	MSO

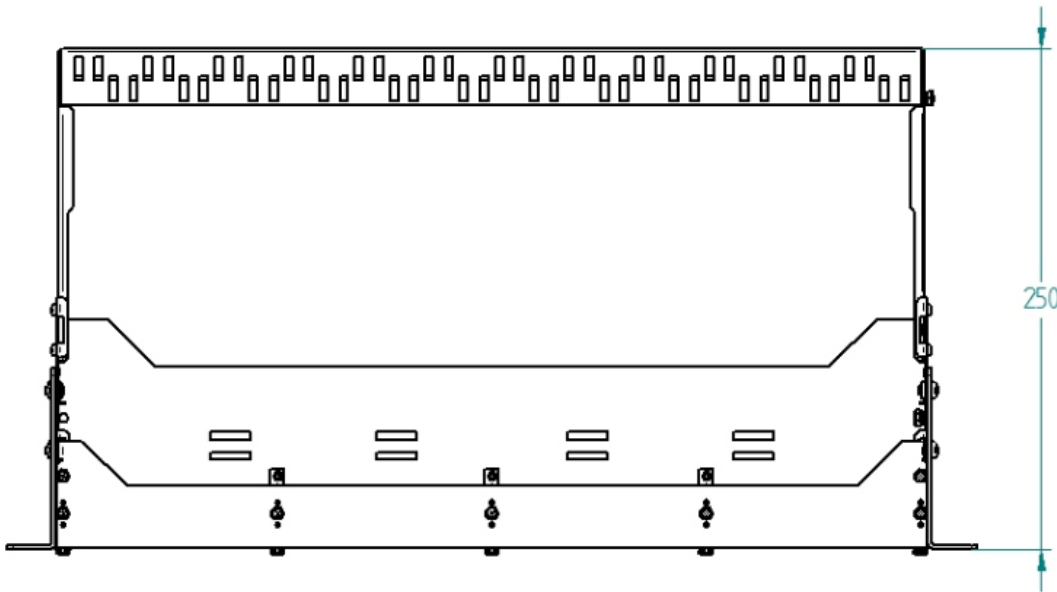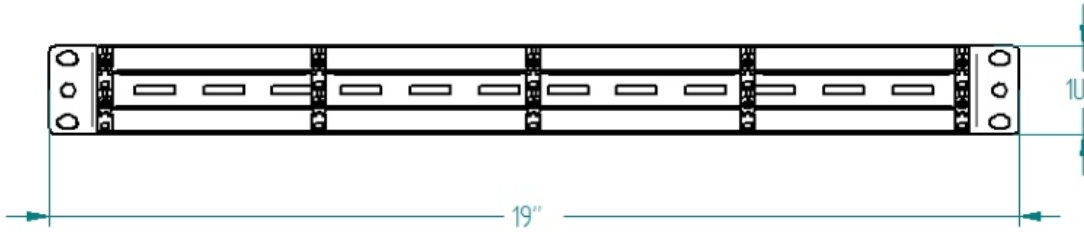

Dimensions			Reference number
Height [U = 44,45mm]	Width [inch]	Depth [mm]	
1 U	19	250	XPS00

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary. 2