

FO MPO cassette, HD, Black




*:illustrative photo

DESCRIPTION:

- Fits a single slot in HD patch panel
- Easy assembling by modular construction
- Available in configuration with 1xMPO and 2xMPO
- Available in 6 or 12 ports configuration
- A/B connections
- Suitable for LCdx, SC, E2000 interface
- Fully equipped FO MPO cassette (quantity of the equipment depends on cassette type)
 - FO adapters – SC/SCA/LC/LCA/E2/E2A
 - Direct split
 - MPO adapter
- Cassette height: ½U

TECHNICAL SPECIFICATION

Height [mm]	21
Width [mm]	100
Depth [mm]	169
Material	Plastic

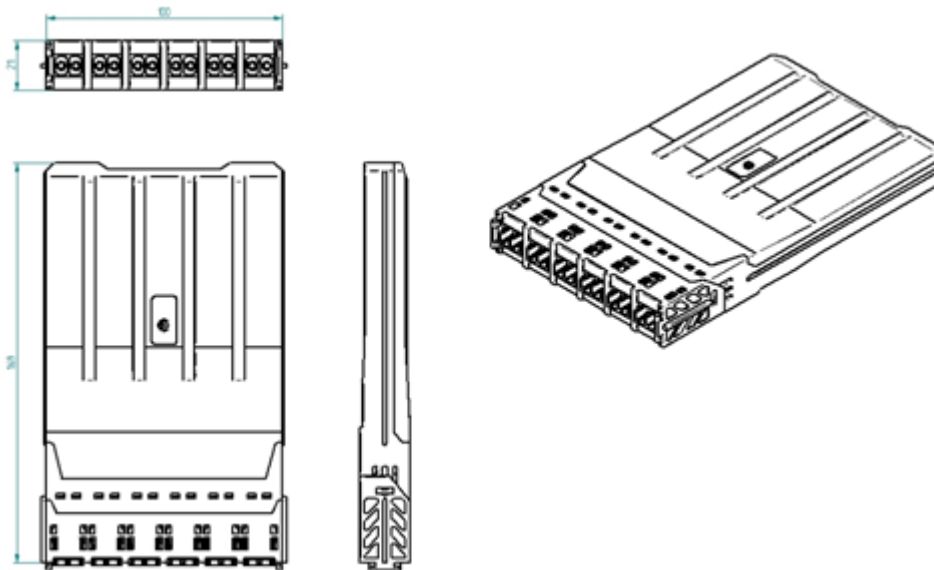

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.

CONFIGURATION

Cassette type	1xMPO	2xMPO
6 PORTS SC/SCA/E2/E2A	6 simplex adapters: SC/SCA/E2/E2A Direct split MPO-6xSC/SCA/E2/E2A MPO adapter	12 simplex adapters: SC/SCA/E2/E2A 2 Direct split MPO-6xSC/SCA/E2/E2A 2 MPO adapter
12 PORTS SC/SCA/E2/E2A	12 simplex adapters: SC/SCA/E2/E2A Direct split MPO-12xSC/SCA/E2/E2A MPO adapter	NA
6 PORTS LC/LCA	6 duplex adapters: LC/LCA Direct split MPO-6xLCdx/LCAdx MPO adapter	NA
12 PORTS LC/LCA	12 duplex adapters: LC/LCA Direct split MPO-12xLCdx/LCAdx MPO adapter	12 duplex adapters: LC/LCA 2 Direct split MPO-6xLCdx/LCAdx 2 MPO adapter

ORDERING

XMA1021CA	FO cassette, 1xMPO/f, typ A, 6x LCdx, MM, OM3
XMA1021DA	FO cassette, 1xMPO/f, typ A, 6x LCdx, MM, OM4
XMA1021HA	FO cassette, 1xMPO/f, typ A, 6x LCdx, MM, OM5
XMA1021GA	FO cassette, 1xMPO/f, typ A, 6x LCdx, SM, OS2 G.652D
XMA1031GA	FO cassette, 1xMPO/f, typ A, 6x LCdx/APC, SM, OS2 G.652D
XMB1021CA	FO cassette, 1xMPO/m, typ A, 6x LCdx, MM, OM3
XMB1021DA	FO cassette, 1xMPO/m, typ A, 6x LCdx, MM, OM4
XMB1021HA	FO cassette, 1xMPO/m, typ A, 6x LCdx, MM, OM5
XMB1021GA	FO cassette, 1xMPO/m, typ A, 6x LCdx, SM, OS2 G.652D
XMB1031GA	FO cassette, 1xMPO/m, typ A, 6x LCdx/APC, SM, OS2 G.652D
XMC1021CA	FO cassette, 1xMPO/f, typ B, 6x LCdx, MM, OM3
XMC1021DA	FO cassette, 1xMPO/f, typ B, 6x LCdx, MM, OM4
XMC1021HA	FO cassette, 1xMPO/f, typ B, 6x LCdx, MM, OM5
XMC1021GA	FO cassette, 1xMPO/f, typ B, 6x LCdx, SM, OS2 G.652D
XMC1031GA	FO cassette, 1xMPO/f, typ B, 6x LCdx/APC, SM, OS2 G.652D
XMD1021CA	FO cassette, 1xMPO/m, typ B, 6x LCdx, MM, OM3
XMD1021DA	FO cassette, 1xMPO/m, typ B, 6x LCdx, MM, OM4
XMD1021HA	FO cassette, 1xMPO/m, typ B, 6x LCdx, MM, OM5
XMD1021GA	FO cassette, 1xMPO/m, typ B, 6x LCdx, SM, OS2 G.652D
XMD1031GA	FO cassette, 1xMPO/m, typ B, 6x LCdx/APC, SM, OS2 G.652D
XMA1041CB	FO cassette, 1xMPO/f, typ A, 12x SC, MM, OM3
XMA1041DB	FO cassette, 1xMPO/f, typ A, 12x SC, MM, OM4
XMA1041HB	FO cassette, 1xMPO/f, typ A, 12x SC, MM, OM5
XMA1041GB	FO cassette, 1xMPO/f, typ A, 12x SC, SM, OS2 G.652D
XMA1051GB	FO cassette, 1xMPO/f, typ A, 12x SC/APC, SM, OS2 G.652D
XMB1041CB	FO cassette, 1xMPO/m, typ A, 12x SC, MM, OM3
XMB1041DB	FO cassette, 1xMPO/m, typ A, 12x SC, MM, OM4
XMB1041HB	FO cassette, 1xMPO/m, typ A, 12x SC, MM, OM5
XMB1041GB	FO cassette, 1xMPO/m, typ A, 12x SC, SM, OS2 G.652D
XMB1051GB	FO cassette, 1xMPO/m, typ A, 12x SC /APC, SM, OS2 G.652D
XMC1041CB	FO cassette, 1xMPO/f, typ B, 12x SC, MM, OM3
XMC1041DB	FO cassette, 1xMPO/f, typ B, 12x SC, MM, OM4
XMC1041HB	FO cassette, 1xMPO/f, typ B, 12x SC, MM, OM5
XMC1041GB	FO cassette, 1xMPO/f, typ B, 12x SC, SM, OS2 G.652D
XMC1051GB	FO cassette, 1xMPO/f, typ B, 12x SC /APC, SM, OS2 G.652D
XMD1041CB	FO cassette, 1xMPO/m, typ B, 12x SC, MM, OM3
XMD1041DB	FO cassette, 1xMPO/m, typ B, 12x SC, MM, OM4
XMD1041HB	FO cassette, 1xMPO/m, typ B, 12x SC, MM, OM5
XMD1041GB	FO cassette, 1xMPO/m, typ B, 12x SC, SM, OS2 G.652D
XMD1051GB	FO cassette, 1xMPO/m, typ B, 12x SC /APC, SM, OS2 G.652D
XMJ1021CB	FO cassette, 2xMPO/f, typ A, 12x LCdx, MM, OM3
XMJ1021DB	FO cassette, 2xMPO/f, typ A, 12x LCdx, MM, OM4
XMJ1021HB	FO cassette, 2xMPO/f, typ A, 12x LCdx, MM, OM5
XMJ1021GB	FO cassette, 2xMPO/f, typ A, 12x LCdx, SM, OS2 G.652D

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.

Type:	FO Modules HD	13.03.2020
	MPO Cassettes	REV: 1.0
		AL

XMJ1031GB	FO cassette, 2xMPO/f, typ A, 12x LCdx/APC, SM, OS2 G.652D
XMK1021CB	FO cassette, 2xMPO/m, typ A, 12x LCdx, MM, OM3
XMK1021DB	FO cassette, 2xMPO/m, typ A, 12x LCdx, MM, OM4
XMK1021HB	FO cassette, 2xMPO/m, typ A, 12x LCdx, MM, OM5
XMK1021GB	FO cassette, 2xMPO/m, typ A, 12x LCdx, SM, OS2 G.652D
XMK1031GB	FO cassette, 2xMPO/m, typ A, 12x LCdx/APC, SM, OS2 G.652D
XML1021CB	FO cassette, 2xMPO/f, typ B, 12x LCdx, MM, OM3
XML1021DB	FO cassette, 2xMPO/f, typ B, 12x LCdx, MM, OM4
XML1021HB	FO cassette, 2xMPO/f, typ B, 12x LCdx, MM, OM5
XML1021GB	FO cassette, 2xMPO/f, typ B, 12x LCdx, SM, OS2 G.652D
XML1031GB	FO cassette, 2xMPO/f, typ B, 12x LCdx/APC, SM, OS2 G.652D
XMM1021CB	FO cassette, 2xMPO/m, typ B, 12x LCdx, MM, OM3
XMM1021DB	FO cassette, 2xMPO/m, typ B, 12x LCdx, MM, OM4
XMM1021HB	FO cassette, 2xMPO/m, typ B, 12x LCdx, MM, OM5
XMM1021GA	FO cassette, 2xMPO/m, typ B, 12x LCdx, SM, OS2 G.652D
XMM1031GA	FO cassette, 2xMPO/m, typ B, 12x LCdx/APC, SM, OS2 G.652D

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.